

# GENEX BR



## Fluorosynthetic Foam AFFF

### ● PERFORMANCE & WARRANTY

GENEX BR meets international requirements  
EN 1568-3  
ISO 7203-1  
EN3

GENEX BR contains corrosion inhibitors.

GENEX BR is designed to work effectively in extinguishers  
for B rating.

GENEX BR can be combined with PENTSPRAY to better the rating  
on A fires.

GENEX BR can be freeze protected with FREEZOL to protect up to  
-30°C.

### ● EXTINGUISHER - Typical ratings:

6 Litre	13A/21A/27A	144B/183B
9 Litre	27A/34A/43A	183B/233B


GENEX BR has a 5 years warranty in its original packaging and at  
storage temperatures -30°C/+60°C.

### ● PHYSICAL DATA

	GENEX BR	
	1B	1R
Appearance liquid / Colour	Red	Orange
Concentration of use	1 - 3%	10 - 17%
Specific Gravity at 20°C (Kg/dm <sup>3</sup> )	1.02	1.05
Viscosity at 20°C (cStokes)	10	10
Freezing point	-22°C	-12°C
Ph at 20°C		8
Sediment after ageing		<0.1%
Surface tension (mN/m)	16	17
Interfacial tension (mN/m)	3	2

### ● FOAM QUALITY

Low Expansion	8
Drainage time 25% / 50%	3 min. / 5 min.

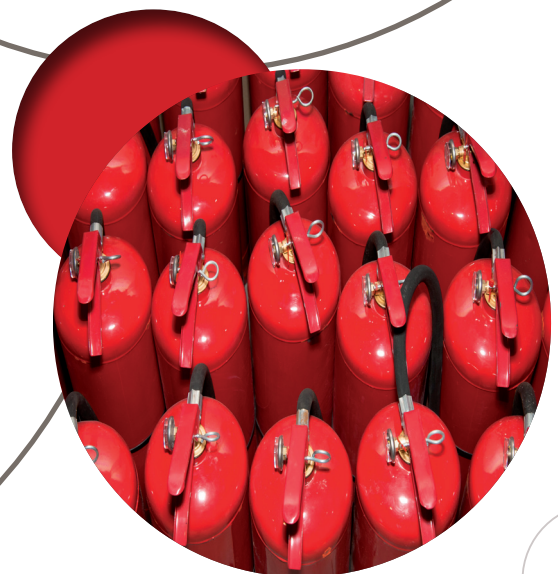

No: FM 560021

Tel. +44 (0) 1536 202919 • Fax +44 (0) 1536 263641 • sales@3fff.co.uk

85B Brunel Road, Earlstree Industrial Estate,  
Corby, Northants, NN17 4JW, United Kingdom

V.A.T. Registration No: 938 9418 70 • Registered in England: 06236589

[www.3fff.co.uk](http://www.3fff.co.uk)